

TipStor

CENTRE DISCHARGE

Collinson

TipStor™ aids an efficient feed management system, bucket fill the silo from your home mix supply or an alternative source of feed on the farm.

A low cost silo for smaller capacities the 55° cone and smooth walls provide excellent mass feed flow for storing free flowing pelleted products, wholegrains or home mix diets to fill a conveyor system, bags or a barrow.

2 models

Mini - 3.9 tonnes blend

Maxi - 7 tonnes blend

Every silo includes:

- Manufactured from 1.5mm galvanised high tensile steel
- SiloTip filling facility 2.5mm hot dip galvanised steel
- Accommodates 8ft bucket for filling
- Roof Vent
- SafetyClean Panel
- Level Indicators
- Smooth internal walls
- Fixing kit and full assembly instructions
- Crane lifting points

Upgrade to a Plasteel™ Finish

Juniper Green
BS 12B29

Olive Green
BS 12B27

Slate Blue
BS 18B29

* Offer only applies to selected colours, other colours are available on request




After a long, long life Collinson Silos are 100% Recyclable

Specifications

KEY

- X - Clearance under cone plate
- A - Funnel lip/tip in height (open position)
- B - Maximum overall height (open position)
- C - Overall height, closed position, collapsed for transport

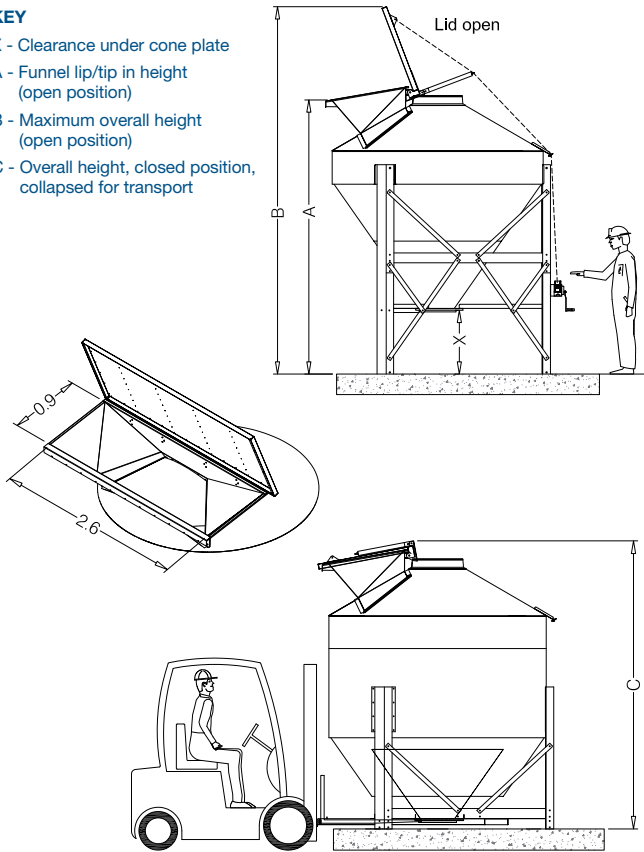

Technical Specifications

Model	Dia (M)	Capacity m ³	Pellets @650kg/m ³	Blends @600kg/m ³	Base (M)
Mini	2.57m	6.55m ³	4.3t	3.9t	2.8x2.8x0.15
Maxi	2.57m	11.74m ³	7.6t	7t	3.2x3.2x0.20

Conveyor Discharge

Model	X	A	B	C
Mini	0.8m	3.33m	4.47m	2.37m
Maxi	0.8m	4.06m	5.50m	3.40m

Gate Valve Slide Discharge

Model	X	A	B	C
Mini	1.3m	3.83m	4.97m	2.37m
Maxi	1.3m	4.86m	6.0m	3.40m

Snacker Discharge

Model	X	A	B	C
Mini	2.2m	4.73m	5.87m	2.37m
Maxi	2.2m	5.76m	6.9m	3.40m

For larger capacities, SiloTip can be integrated into the County Range silos. For more information please speak to our sales team.

Delivery Options

Collinson Delivery

Delivery will be made by appointment so that the customer can ensure a telehandler* is present for offloading immediately on arrival.

*Lifting slings or fork lift will be required for offloading, forklines must be at least 1250mm long.

Customer Collection

A flat bed vehicle, with a maximum bed height of 1.5m above road level, must be provided. A collection date and time will be arranged in advance. We are happy to load the TipStor for a 3rd party haulier arranged by the customer.

All you need to do

- 1) Provide a suitable concrete base
- 2) Off load the Tipstor with a telehandler
- 3) Attach lower leg sections whilst suspended
- 4) Fix lower cone
- 5) Bolt securely to base
- 6) Remove fork lift channels
- 7) Fill and enjoy the ease of use!



Offloading

Forklift channels are provided for unloading and assembly purposes only; these should be removed after the silo has been bolted to the base. The Tipstor may also be unloaded using the 3 permanent crane lifting points, located one at the top of each leg.

Fitting lower leg sections

Whilst the silo is supported by the telehandler, the lower leg sections (and lower cone) should be fitted. Note that this should be performed in a safe manner following the instructions provided.

Base

It is your responsibility as the customer to provide a suitable grade C30, ready mix concrete base, dimensions as per our recommendation to suit your chosen model.

Bolting Down

The customer must ensure that the Tipstor is fixed securely to the concrete base. A fixing kit c/w leg packers is supplied.

IMPORTANT NOTE: Ensure forklift channels are removed after the silo has been secured as they are not designed for use when the silo is in operation.